


EXHAUST SILENCERS




Type ABS

Damping level 20-25 dB(A) without integrated Spark Arrestor

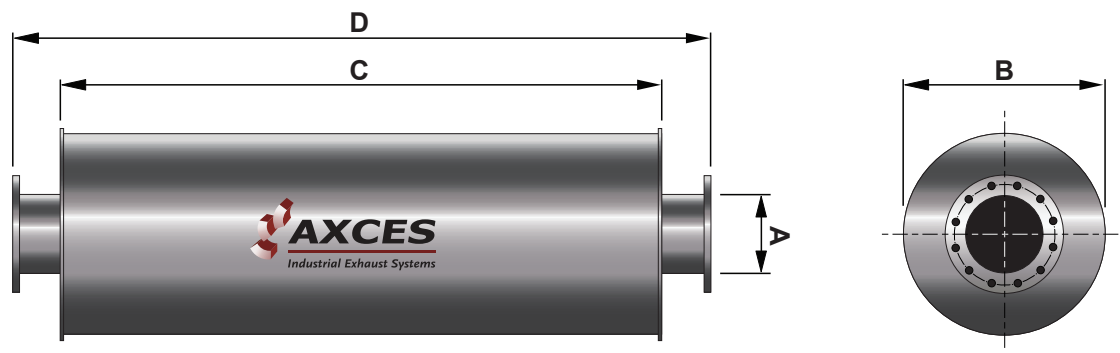

Article. No	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (mass)
130100000015	1.5"	40	48.3	114	620	750	6 kg
130100000020	2"	50	60.3	143	670	800	8 kg
130100000025	2.5"	60	76.1	172	750	880	10 kg
130100000030	3"	80	88.9	187	820	950	15 kg
130100000040	4"	100	114.3	243	1000	1140	25 kg
130100000050	5"	125	139.7	313	1220	1250	30 kg
130100000060	6"	150	168.3	376	1250	1450	50 kg
130100000080	8"	200	219.1	388	1500	1700	95 kg
130100000100	10"	250	273.0	584	2000	2250	175 kg
130100000120	12"	300	323.9	611	2000	2250	225 kg
130100000140	14"	350	355.6	671	2250	2500	270 kg
130100000160	16"	400	406.4	751	2750	3000	350 kg
130100000180	18"	450	457.2	851	3250	3500	420 kg
130100000200	20"	500	508.0	951	3750	4000	500 kg

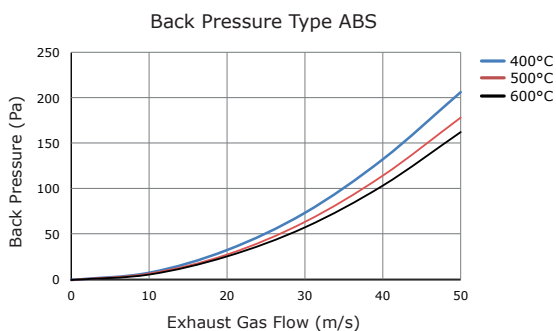

Damping Of The Noise Level +/- 20-25 dB(A)

Damping Basics of the silencers type ABS are according the absorption principal

Spark Arrestor The silencers type ABS are excluding an integrated Spark Arrestor

Mounting The silencers type ABS can be installed both horizontal and vertical

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s

Material Silencers type ABS are produced out of Steel 37-2 (S235JRG2)

Temperature Maximum allowable temperature is 600 °C

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements

