


EXHAUST SILENCERS





Type CP24

Damping level 24 dB(A) with integrated Spark Arrestor

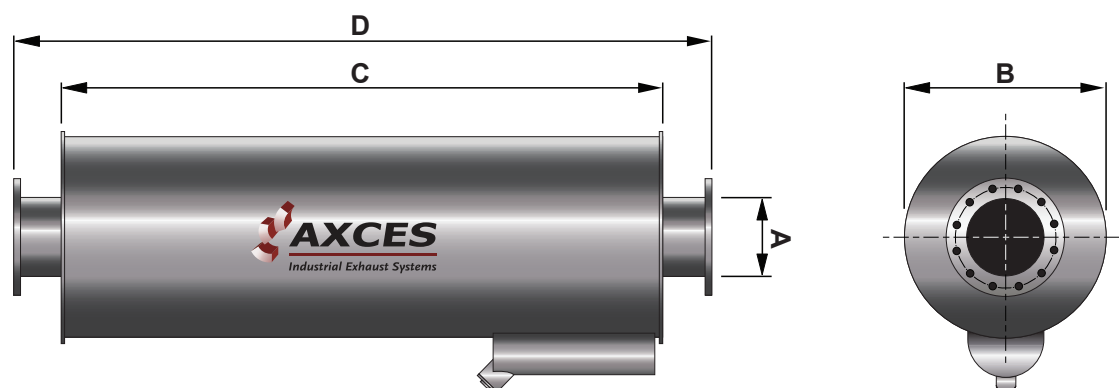

Article. No	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (mass)
12110000020	2"	50	60.3	250	500	650	20 kg
12110000025	2.5"	60	76.1	300	500	650	25 kg
12110000030	3"	80	88.9	300	665	915	30 kg
12110000040	4"	100	114.3	400	835	1085	45 kg
12110000050	5"	125	139.7	400	1000	1250	55 kg
12110000060	6"	150	168.3	480	1000	1250	75 kg
12110000080	8"	200	219.1	600	1165	1415	105 kg
121100000100	10"	250	273.0	700	1500	1750	150 kg
121100000120	12"	300	323.9	800	1665	1915	195 kg
121100000140	14"	350	355.6	950	2000	2250	275 kg
121100000160	16"	400	406.4	950	2335	2585	305 kg
121100000180	18"	450	457.2	1100	2665	1915	405 kg
121100000200	20"	500	508.0	1200	3000	3250	510 kg

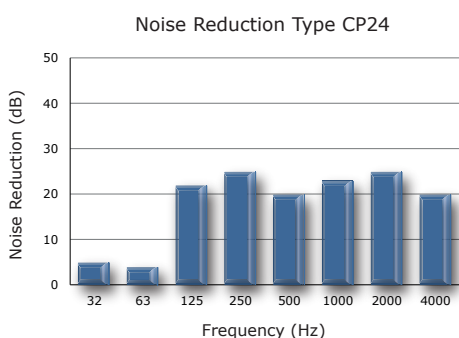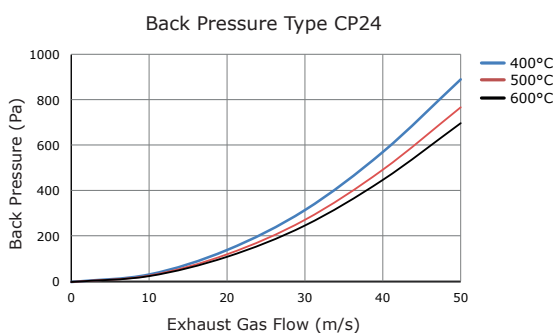

Damping Of The Noise Level +/- 24 dB(A)

Damping Basics of the silencers type CP24 are according the reflection principal

Spark Arrestor The silencers type CP24 can be installed in exhaust systems where sparks, flammable carbon particles, or other parts have to be separated

Mounting The silencers type CP24 can be installed both horizontal and vertical

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s

Material Silencers type CP24 are produced out of Steel 37-2 (S235JRG2)

Temperature Maximum allowable temperature is 600 °C

Custom Made Silencers type CP24 are also manufactured based on specific dimensions or client's requirements