


GRAPHITE GASKET TYPE CIRCULAR DIN 2573 - PN6

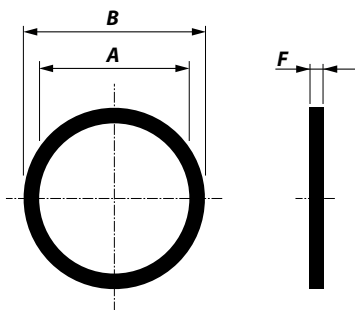

| Article No. | Size (Inch) | NB (mm) | Pipe (mm) | A (mm) | B (mm) | F (mm) | Weight (kg) |
|--------------|-------------|---------|-----------|--------|--------|--------|-------------|
| 213300030010 | 1 | 25 | 33.4 | 35 | 75 | 2 | 0.1 |
| 213300030013 | 1.25 | 32 | 42.2 | 43 | 90 | 2 | 0.1 |
| 213300030015 | 1.5 | 40 | 48.3 | 49 | 100 | 2 | 0.1 |
| 213300030020 | 2 | 50 | 60.3 | 61 | 110 | 2 | 0.1 |
| 213300030025 | 2.5 | 65 | 76.1 | 73 | 130 | 2 | 0.2 |
| 213300030030 | 3 | 80 | 88.9 | 90 | 150 | 2 | 0.2 |
| 213300030040 | 4 | 100 | 114.3 | 116 | 170 | 2 | 0.2 |
| 213300030050 | 5 | 125 | 139.7 | 142 | 200 | 2 | 0.2 |
| 213300030060 | 6 | 150 | 168.3 | 171 | 225 | 2 | 0.3 |
| 213300030080 | 8 | 200 | 219.1 | 222 | 280 | 2 | 0.3 |
| 213300030100 | 10 | 250 | 273.0 | 276 | 335 | 2 | 0.3 |
| 213300030120 | 12 | 300 | 323.9 | 327 | 395 | 2 | 0.3 |
| 213300030140 | 14 | 350 | 355.6 | 360 | 445 | 2 | 0.4 |
| 213300030160 | 16 | 400 | 406.4 | 411 | 495 | 2 | 0.4 |
| 213300030180 | 18 | 450 | 457.2 | 461 | 550 | 2 | 0.4 |
| 213300030200 | 20 | 500 | 508.0 | 512 | 600 | 2 | 0.5 |
| 213300030240 | 24 | 600 | 609.6 | 614 | 705 | 2 | 0.8 |
| 213300030280 | 28 | 700 | 711.2 | 716 | 810 | 2 | 0.8 |
| 213300030320 | 32 | 800 | 812.8 | 818 | 920 | 2 | 0.8 |
| 213300030360 | 36 | 900 | 914.4 | 920 | 1020 | 2 | 1 |
| 213300030400 | 40 | 1000 | 1016.0 | 1022 | 1120 | 2 | 1 |

CHARACTERISTICS

Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C