


TYPE ACC01

Clamped Fabric Compensators



Article No.	A Size (Inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
361000000050	5	125	139.7	180	199	300	2	240
361000000060	6	150	168.3	210	231	330	2	270
361000000080	8	200	219.1	260	282	380	2	320
361000000100	10	250	273.0	315	336	435	2	375
361000000120	12	300	323.9	365	386	485	2	425
361000000140	14	350	355.6	395	418	520	2	460
361000000160	16	400	406.4	450	469	570	3	510
361000000180	18	450	457.2	500	521	620	3	560
361000000200	20	500	508.0	550	571	670	3	610

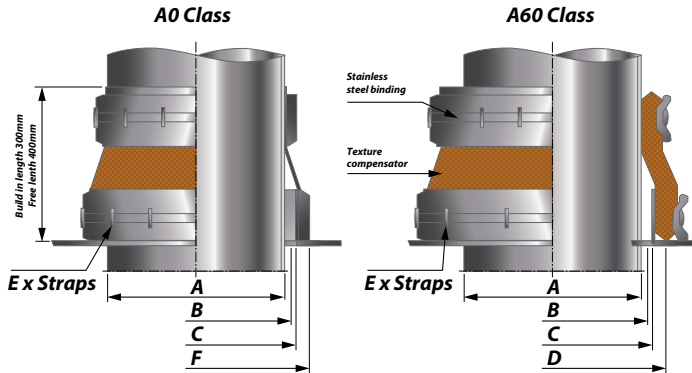

CHARACTERISTICS

- ✓ Compensation of thermal and/or mechanical movement
- ✓ in axial, lateral or angular direction.
- ✓ Isolation of vibration and heat as well as pipe work borne
- ✓ sound transmission.
- ✓ Low reaction force due to movements.
- ✓ Separation of compartments.
- ✓ Compensation of pipework misalignment.
- ✓ LRoS type approval.