


GRAPHITE GASKET TYPE FULL FACE JIS B2220 - 5K

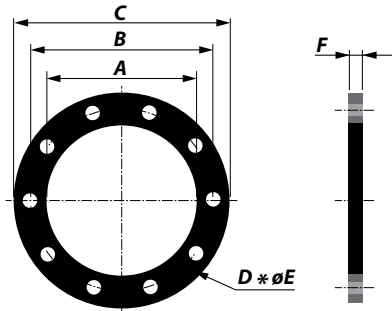

| Article No. | Size (Inch) | NB (mm) | Pipe (mm) | A (mm) | B (mm) | C (mm) | D Number of holes | E Diameter of holes (mm) | F (mm) | Weight (kg) |
|--------------|-------------|---------|-----------|--------|--------|--------|-------------------|--------------------------|--------|-------------|
| 213140020010 | 1 | 25 | 33.4 | 35 | 75 | 95 | 4 | 12 | 2 | 0.1 |
| 213140020013 | 1.25 | 32 | 42.2 | 43 | 90 | 115 | 4 | 15 | 2 | 0.1 |
| 213140020015 | 1.5 | 40 | 48.3 | 49 | 95 | 120 | 4 | 15 | 2 | 0.1 |
| 213140020020 | 2 | 50 | 60.3 | 61 | 105 | 130 | 4 | 15 | 2 | 0.1 |
| 213140020025 | 2.5 | 65 | 76.1 | 77 | 130 | 155 | 4 | 15 | 2 | 0.2 |
| 213140020030 | 3 | 80 | 88.9 | 90 | 145 | 180 | 4 | 19 | 2 | 0.2 |
| 213140020040 | 4 | 100 | 114.3 | 116 | 165 | 200 | 8 | 19 | 2 | 0.2 |
| 213140020050 | 5 | 125 | 139.7 | 142 | 200 | 235 | 8 | 19 | 2 | 0.2 |
| 213140020060 | 6 | 150 | 168.3 | 167 | 230 | 265 | 8 | 19 | 2 | 0.3 |
| 213140020080 | 8 | 200 | 219.1 | 218 | 280 | 320 | 8 | 23 | 2 | 0.3 |
| 213140020100 | 10 | 250 | 273.0 | 270 | 345 | 385 | 12 | 23 | 2 | 0.3 |
| 213140020120 | 12 | 300 | 323.9 | 321 | 390 | 430 | 12 | 23 | 2 | 0.3 |
| 213140020140 | 14 | 350 | 355.6 | 358 | 435 | 480 | 12 | 25 | 2 | 0.4 |
| 213140020160 | 16 | 400 | 406.4 | 409 | 495 | 540 | 16 | 25 | 2 | 0.4 |
| 213140020180 | 18 | 450 | 457.2 | 460 | 555 | 605 | 16 | 25 | 2 | 0.4 |
| 213140020200 | 20 | 500 | 508.0 | 511 | 605 | 655 | 20 | 25 | 2 | 0.5 |
| 213140020240 | 24 | 600 | 609.6 | 613 | 715 | 770 | 20 | 27 | 2 | 0.8 |
| 213140020280 | 28 | 700 | 711.2 | 715 | 820 | 875 | 24 | 27 | 2 | 0.8 |
| 213140020320 | 32 | 800 | 812.8 | 817 | 930 | 995 | 24 | 33 | 2 | 0.8 |
| 213140020360 | 36 | 900 | 914.4 | 919 | 1030 | 1095 | 24 | 33 | 2 | 1 |
| 213140020400 | 40 | 1000 | 1016.0 | 1021 | 1130 | 1195 | 28 | 33 | 2 | 1 |

CHARACTERISTICS

Gaskets Hole pattern according type JIS Standard

Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C