


TYPE AC22

Compact Compensators with welded ends



Article No.	A Size (inch)	NB (mm)	Pipe (mm)	D (mm)	C (mm)	Movements		Springrate	
						Axial ± (mm)	Lateral ± (mm)	Axial ± (mm)	Lateral ± (mm)
322085150015	1.5	40	48.3	150	60.3	25	8	47	89
322085150020	2	50	60.3	150	78.3	25	8	68	166
322085150025	2.5	65	76.1	150	96.7	25	8	56	169
322085150030	3	80	88.9	150	109.7	25	8	63	219
322085150040	4	100	114.3	150	140.5	25	6	59	293
322085150050	5	125	139.7	150	165.7	25	5	71	420
322085150060	6	150	168.3	150	200.5	25	5	56	389
322085150080	8	200	219.1	150	251.1	25	5	69	608
322085150100	10	250	273.0	150	305.2	25	4	86	933
322085150120	12	300	323.9	150	360.9	25	4	81	1042

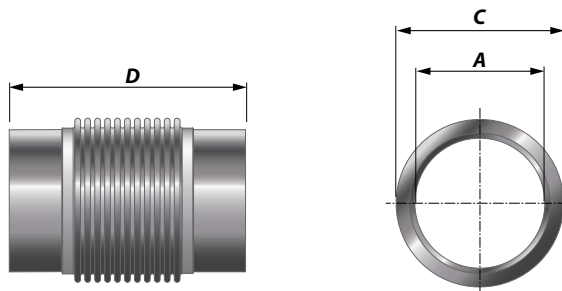

CHARACTERISTICS

- ✓ Stainless steel expansion joint AISI 321
- ✓ Max. pressure: 2.5 bar (20°C)
- ✓ Double ply bellows material
- ✓ Max. temperature: 550°C
- ✓ Carbon steel weld ends
- ✓ All are stock items
- ✓ Compact Line