

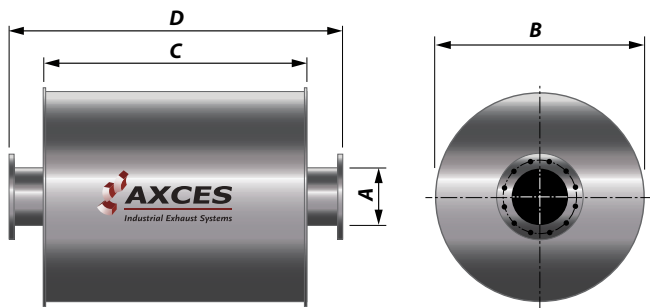


TYPE ACR

Damping level 25 dB(A)
without integrated Spark Arrestor



Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
170100000020	2	50	60.3	206	215	300	10
170100000025	2,5	60	76.1	306	320	420	14
170100000030	3	80	88.9	306	320	420	20
170100000040	4	100	114.3	356	390	540	25
170100000050	5	125	139.7	401	535	650	30
170100000060	6	150	168.3	482	606	750	40
170100000080	8	200	219.1	556	756	900	50
170100000100	10	250	273.0	708	856	1000	60
170100000120	12	300	323.9	800	1006	1200	70
170100000140	14	350	355.6	908	1256	1500	100
170100000160	16	400	406.4	1060	1408	1600	160
170100000180	18	450	457.2	1212	1510	1700	200
170100000200	20	500	508.0	1312	1810	2000	250

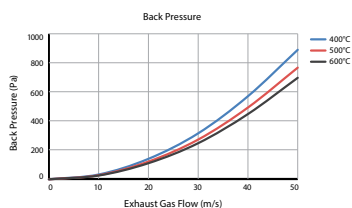

Damping Of The Noise Level ± 25 dB(A).

Damping Basics of the silencers type ACR are according the reflection absorption principal.

Spark Arrestor The silencers type ACR are excluding an integrated Spark Arrestor.

Mounting The silencers type ACR can be installed both horizontal and vertical.

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s.

Material Silencers type ACR are produced out of Steel 37-2 (S235JRG2).

Temperature Maximum allowable temperature is 600°C.

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements.