

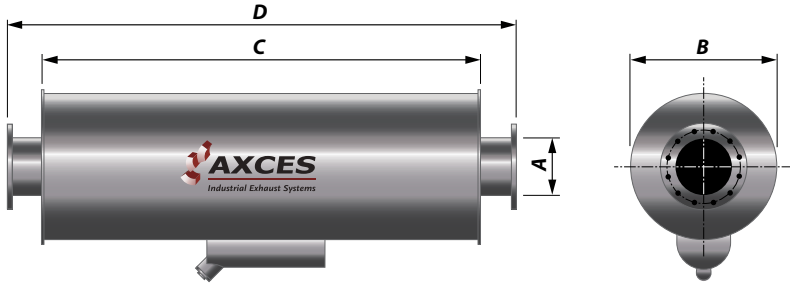


TYPE REAB35-IS

Damping level 35 dB(A)
with integrated Spark Arrestor



Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
14120000015	1.5	40	48.3	200	750	900	10
14120000020	2	50	60.3	200	750	900	15
14120000025	2.5	60	76.1	260	850	1000	22
14120000030	3	80	88.9	310	850	1000	30
14120000040	4	100	114.3	360	1270	1500	50
14120000050	5	125	139.7	400	1270	1500	65
14120000060	6	150	168.3	475	1500	1750	125
14120000080	8	200	219.1	560	1750	2000	170
14120000100	10	250	273.0	635	2250	2500	250
14120000120	12	300	323.9	760	2500	2750	320
14120000140	14	350	355.6	800	2750	3000	410
14120000160	16	400	406.4	860	3000	3250	500
14120000180	18	450	457.2	910	3250	3500	565
14120000200	20	500	508.0	960	3500	3750	640

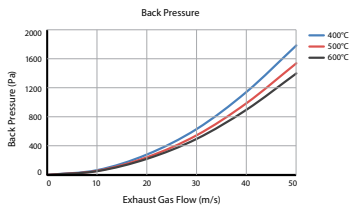

Damping Of The Noise Level ± 35 dB(A).

Damping Basics of the silencers type REAB35-IS are according the reflection-absorption principal.

Spark Arrestor The silencers type REAB35-IS are including an integrated Spark Arrestor.

Mounting The silencers type REAB35-IS can be installed both horizontal and vertical.

Exhaust Gas Speed Advised Exhaust Gas.

Speed between 20-50 m/s.

Material Silencers type REAB35-IS are produced out of Steel 37-2 (S235JRG2).

Temperature Maximum allowable temperature is 600°C.

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements.