

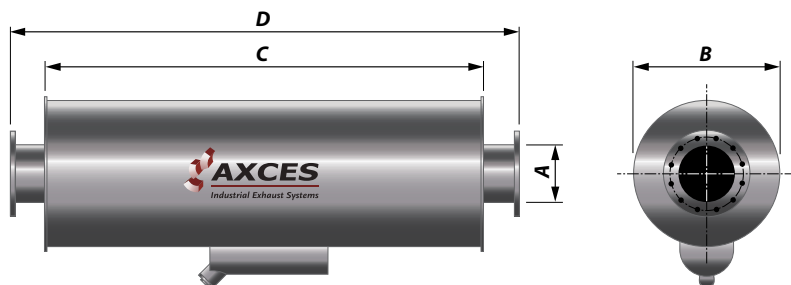


## TYPE REAB40-IS

Damping level 40 dB(A)  
with integrated Spark Arrestor



Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
14130000015	1.5	40	48.3	250	750	900	20
14130000020	2	50	60.3	250	750	900	25
14130000025	2.5	60	76.1	300	750	900	35
14130000030	3	80	88.9	300	1000	1250	40
14130000040	4	100	114.3	400	1250	1500	80
14130000050	5	125	139.7	400	1500	1750	90
14130000060	6	150	168.3	480	1500	1750	130
14130000080	8	200	219.1	600	1750	2000	200
14130000100	10	250	273.0	700	2250	2500	300
14130000120	12	300	323.9	800	2500	2750	400
14130000140	14	350	355.6	950	3000	3250	625
14130000160	16	400	406.4	950	3500	3750	800
14130000180	18	450	457.2	1100	4000	4250	1250
14130000200	20	500	508.0	1200	4500	4750	1500

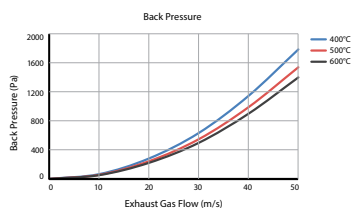

**Damping Of The Noise Level**  $\pm 40$  dB(A).

**Damping Basics** of the silencers type REAB40-IS are according the reflectionabsorption principal.

**Spark Arrestor** The silencers type REAB40-IS are including an integrated Spark Arrestor.

**Mounting** The silencers type REAB40-IS can be installed both horizontal and vertical.

**Exhaust Gas Speed** Advised Exhaust Gas Speed between 20-50 m/s.

**Material** Silencers type REAB40-IS are produced out of Steel 37-2 (S235JRG2).

**Temperature** Maximum allowable temperature is 600°C.

**Custom Made** Axces silencers are also manufactured based on specific dimensions or client's requirements.