

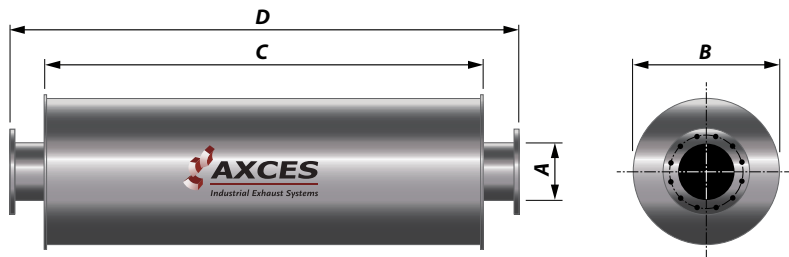


TYPE REAB40

Damping level 40 dB(A)
without integrated Spark Arrestor



Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
14030000015	1.5	40	48.3	250	750	900	20
14030000020	2	50	60.3	250	750	900	25
14030000025	2.5	60	76.1	300	750	900	35
14030000030	3	80	88.9	300	1000	1250	40
14030000040	4	100	114.3	400	1250	1500	80
14030000050	5	125	139.7	400	1500	1750	90
14030000060	6	150	168.3	480	1500	1750	130
14030000080	8	200	219.1	600	1750	2000	200
14030000100	10	250	273.0	700	2250	2500	300
14030000120	12	300	323.9	800	2500	2750	400
14030000140	14	350	355.6	950	3000	3250	625
14030000160	16	400	406.4	950	3500	3750	800
14030000180	18	450	457.2	1100	4000	4250	1250
14030000200	20	500	508.0	1200	4500	4750	1500

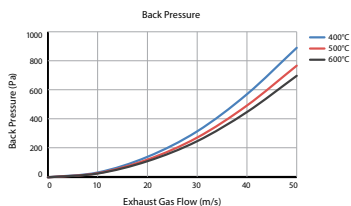

Damping Of The Noise Level ± 40 dB(A).

Damping Basics of the silencers type REAB40 are according to the reflection/absorption principle.

Spark Arrestor The silencers type REAB40 are excluding an integrated Spark Arrestor.

Mounting The silencers type REAB40 can be installed both horizontal and vertical.

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s.

Material Silencers type REAB40 are produced out of Steel 37-2 (S235JRG2).

Temperature Maximum allowable temperature is 600°C.

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements.