

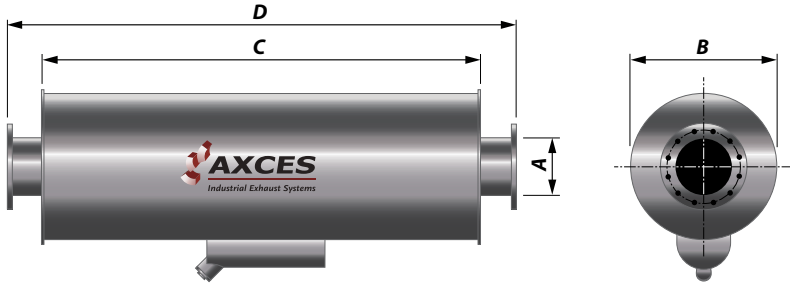


TYPE REAB45-IS

Damping level 45 dB(A)
with integrated Spark Arrestor



Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
14140000015	1.5	40	48.3	260	850	1000	30
14140000020	2	50	60.3	310	850	1000	40
14140000025	2.5	60	76.1	360	1250	1500	60
14140000030	3	80	88.9	380	1250	1500	70
14140000040	4	100	114.3	475	1500	1750	120
14140000050	5	125	139.7	475	1500	1750	130
14140000060	6	150	168.3	560	2250	2500	200
14140000080	8	200	219.1	660	2250	2500	260
14140000100	10	250	273.0	860	2750	3000	480
14140000120	12	300	323.9	910	3000	3250	550
14140000140	14	350	355.6	960	3500	3750	690
14140000160	16	400	406.4	1060	4000	4250	1050
14140000180	18	450	457.2	1210	4500	4750	1400
14140000200	20	500	508.0	1300	5000	5250	1735

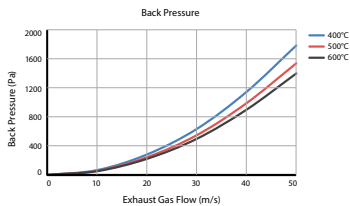

Damping Of The Noise Level ± 45 dB(A).

Damping Basics of the silencers type REAB45-IS are according the reflectionabsorption principal.

Spark Arrestor The silencers type REAB45-IS are including an integrated Spark Arrestor.

Mounting The silencers type REAB45-IS can be installed both horizontal and vertical.

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s.

Material Silencers type REAB45-IS are produced out of Steel 37-2 (S235JRG2).

Temperature Maximum allowable temperature is 600°C.

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements.