

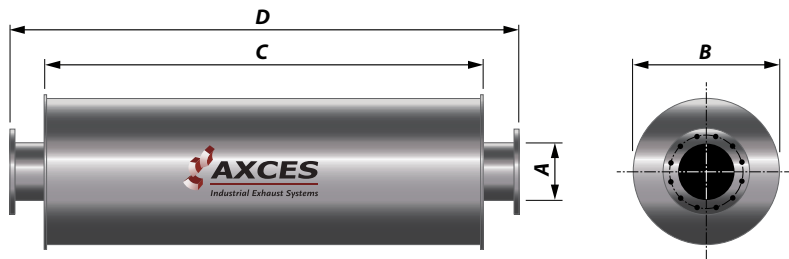


## TYPE REF25

Damping level 20 dB(A)  
without integrated Spark Arrestor



Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
150100000015	1.5	40	48.3	200	750	900	15
150100000020	2	50	60.3	200	750	900	16
150100000025	2.5	60	76.1	260	850	1000	22
150100000030	3	80	88.9	310	850	1000	30
150100000040	4	100	114.3	360	1270	1500	50
150100000050	5	125	139.7	400	1270	1500	65
150100000060	6	150	168.3	475	1500	1750	120
150100000080	8	200	219.1	560	1750	2000	165
150100000100	10	250	273.0	635	2250	2500	230
150100000120	12	300	323.9	760	2500	2750	330
150100000140	14	350	355.6	860	2750	3000	380
150100000160	16	400	406.4	910	3000	3250	410
150100000180	18	450	457.2	960	3250	3500	480
150100000200	20	500	508.0	1060	3500	3750	705

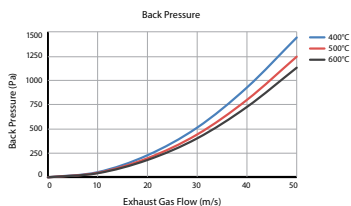

**Damping Of The Noise Level**  $\pm 20$  dB(A).

**Damping Basics** of the silencers type REF25 are according the reflection principal.

**Spark Arrestor** The silencers type REF25 are excluding an integrated Spark Arrestor.

**Mounting** The silencers type REF25 can be installed both horizontal and vertical.

**Exhaust Gas Speed** Advised Exhaust Gas Speed between 20-50 m/s.

**Material** Silencers type REF25 are produced out of Steel 37-2 (S235JRG2).

**Temperature** Maximum allowable temperature is 600°C.

**Custom Made** Axces silencers are also manufactured based on specific dimensions or client's requirements.