

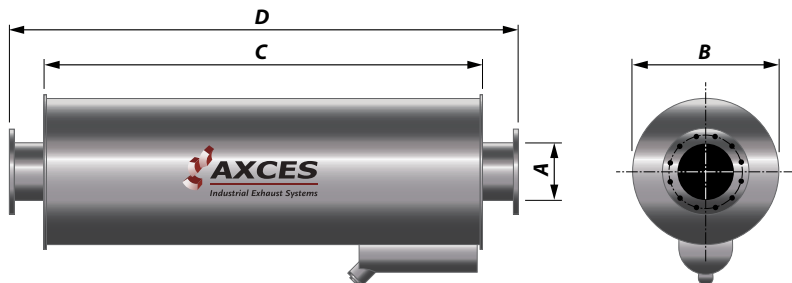


TYPE CP24

Damping level 24 dB(A)
with integrated Spark Arrestor



Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
121100000020	2	50	60.3	250	500	650	20
121100000025	2.5	60	76.1	300	500	650	25
121100000030	3	80	88.9	300	665	915	30
121100000040	4	100	114.3	400	835	1085	45
121100000050	5	125	139.7	400	1000	1250	55
121100000060	6	150	168.3	480	1000	1250	75
121100000080	8	200	219.1	600	1165	1415	105
121100000100	10	250	273.0	700	1500	1750	150
121100000120	12	300	323.9	800	1665	1915	195
121100000140	14	350	355.6	950	2000	2250	275
121100000160	16	400	406.4	950	2335	2585	305
121100000180	18	450	457.2	1100	2665	1915	405
121100000200	20	500	508.0	1200	3000	3250	510

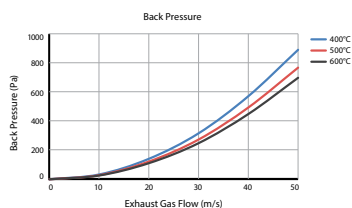

Damping Of The Noise Level ± 24 dB(A).

Damping Basics of the silencers type CP24 are according the reflection principal.

Spark Arrestor The silencers type CP24 can be installed in exhaust systems where sparks, flammable carbon particles, or other parts have to be separated.

Mounting The silencers type CP24 can be installed both horizontal and vertical.

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s.

Material Silencers type CP24 are produced out of Steel 37-2 (S235JRG2).

Temperature Maximum allowable temperature is 600°C.

Custom Made Silencers type CP24 are also manufactured based on specific dimensions or client's requirements.