




**EXHAUST  
COMPENSATORS**



## TYPE AC13

Compensators with welded ends

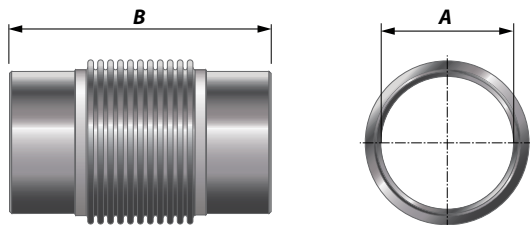

| Article No.  | A Size<br>(Inch) | NB<br>(mm) | Pipe<br>(mm) | B Length<br>(mm) | Movements        |                    |
|--------------|------------------|------------|--------------|------------------|------------------|--------------------|
|              |                  |            |              |                  | Axial $\pm$ (mm) | Lateral $\pm$ (mm) |
| 331085195015 | 1.5              | 40         | 48.3         | 195              | 35               | 18                 |
| 331085195020 | 2                | 50         | 60.3         | 195              | 35               | 18                 |
| 331085210025 | 2.5              | 65         | 76.1         | 210              | 38               | 16                 |
| 331085250030 | 3                | 80         | 88.9         | 250              | 32               | 22                 |
| 331085290040 | 4                | 100        | 114.3        | 290              | 32               | 28                 |
| 331085305050 | 5                | 125        | 139.7        | 305              | 32               | 22                 |
| 331085305060 | 6                | 150        | 168.3        | 305              | 32               | 20                 |
| 331085310080 | 8                | 200        | 219.1        | 310              | 32               | 16                 |
| 331085320100 | 10               | 250        | 273.0        | 320              | 40               | 17                 |
| 331085320120 | 12               | 300        | 323.9        | 320              | 40               | 15                 |
| 331085330140 | 14               | 350        | 355.6        | 330              | 40               | 14                 |
| 331085340160 | 16               | 400        | 406.4        | 340              | 64               | 13                 |
| 331085340180 | 18               | 450        | 457.2        | 340              | 64               | 11                 |
| 331085340200 | 20               | 500        | 508.0        | 340              | 64               | 10                 |
| 331085350240 | 24               | 600        | 609.6        | 350              | 64               | 9                  |




### CHARACTERISTICS

- ✓ Stainless steel expansion joint AISI 321
- ✓ Max. pressure: 2.5 bar (20°C)
- ✓ Double Ply Bellows material
- ✓ Max. temperature: 550 °C
- ✓ Carbon steel welded ends
- ✓ All are stock items
- ✓ Standard length

## TYPE AC14

Double Compensators with welded ends

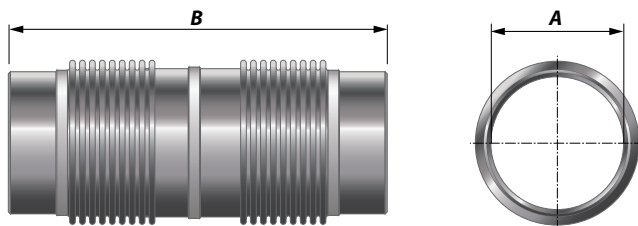

| Article No.  | A Size<br>(Inch) | NB<br>(mm) | Pipe<br>(mm) | B Length<br>(mm) | Movements        |                    |
|--------------|------------------|------------|--------------|------------------|------------------|--------------------|
|              |                  |            |              |                  | Axial $\pm$ (mm) | Lateral $\pm$ (mm) |
| 331285400030 | 3                | 80         | 88.9         | 400              | 80               | 35                 |
| 331285400040 | 4                | 100        | 114.3        | 400              | 69               | 40                 |
| 331285400050 | 5                | 125        | 139.7        | 400              | 70               | 60                 |
| 331285500060 | 6                | 150        | 168.3        | 500              | 75               | 70                 |
| 331285500080 | 8                | 200        | 219.1        | 500              | 75               | 70                 |
| 331285500100 | 10               | 250        | 273.0        | 500              | 55               | 32                 |
| 331285500120 | 12               | 300        | 323.9        | 500              | 64               | 43                 |
| 331285500140 | 14               | 350        | 355.6        | 500              | 64               | 39                 |
| 331285600160 | 16               | 400        | 406.4        | 600              | 90               | 75                 |
| 331285600180 | 18               | 450        | 457.2        | 600              | 90               | 69                 |
| 331285600200 | 20               | 500        | 508.0        | 600              | 90               | 62                 |
| 331285600240 | 24               | 600        | 609.6        | 600              | 90               | 52                 |
| 331285600280 | 28               | 700        | 711.2        | 600              | 90               | 45                 |
| 331285600320 | 32               | 800        | 812.8        | 600              | 90               | 39                 |
| 331285600360 | 36               | 900        | 914.4        | 600              | 90               | 35                 |
| 331285600400 | 40               | 1000       | 1016.0       | 600              | 90               | 31                 |

\*Movements (axial/lateral) are not in combination.




## CHARACTERISTICS

- ✓ Stainless steel expansion joint AISI 321
- ✓ Max. pressure: 2.5 bar (20°C)
- ✓ Double Ply Bellows material
- ✓ Max. temperature: 550°C
- ✓ Twin bellows construction
- ✓ Carbon steel weld ends
- ✓ All are stock items
- ✓ Long length

## TYPE AC15

Compensators with rotatable flanges PN6

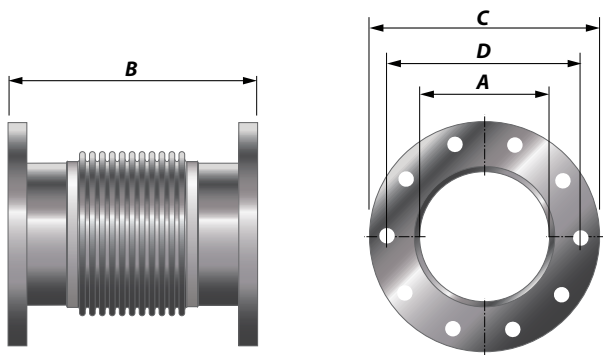

| Article No.  | A Size<br>(Inch) | NB<br>(mm) | Pipe<br>(mm) | B<br>Length<br>(mm) | Flange            |                   |                          | Movements*      |                   |
|--------------|------------------|------------|--------------|---------------------|-------------------|-------------------|--------------------------|-----------------|-------------------|
|              |                  |            |              |                     | C<br>O.D.<br>(mm) | Holes x d<br>(mm) | D<br>Bolt circle<br>(mm) | Axial ±<br>(mm) | Lateral ±<br>(mm) |
| 331405195015 | 1.5              | 40         | 48.3         | 195                 | 130               | 4 x 14            | 100                      | 35              | 18                |
| 331405195020 | 2                | 50         | 60.3         | 195                 | 140               | 4 x 14            | 110                      | 35              | 18                |
| 331405210025 | 2.5              | 65         | 76.1         | 210                 | 160               | 4 x 14            | 130                      | 38              | 16                |
| 331405250030 | 3                | 80         | 88.9         | 250                 | 190               | 4 x 18            | 150                      | 32              | 22                |
| 331405290040 | 4                | 100        | 114.3        | 290                 | 210               | 4 x 18            | 170                      | 32              | 28                |
| 331405305050 | 5                | 125        | 139.7        | 305                 | 240               | 8 x 18            | 200                      | 32              | 22                |
| 331405305060 | 6                | 150        | 168.3        | 305                 | 265               | 8 x 18            | 225                      | 32              | 20                |
| 331405310080 | 8                | 200        | 219.1        | 310                 | 320               | 8 x 18            | 280                      | 32              | 16                |
| 331405320100 | 10               | 250        | 273.0        | 320                 | 375               | 12 x 18           | 335                      | 40              | 17                |
| 331405320120 | 12               | 300        | 323.9        | 320                 | 440               | 12 x 22           | 395                      | 40              | 15                |
| 331405330140 | 14               | 350        | 355.6        | 330                 | 490               | 12 x 22           | 445                      | 40              | 14                |
| 331405340160 | 16               | 400        | 406.4        | 340                 | 540               | 16 x 22           | 495                      | 64              | 13                |
| 331405340180 | 18               | 450        | 457.2        | 340                 | 595               | 16 x 22           | 550                      | 64              | 11                |
| 331405340200 | 20               | 500        | 508.0        | 340                 | 645               | 20 x 22           | 600                      | 64              | 10                |
| 331405350240 | 24               | 600        | 609.6        | 350                 | 755               | 20 x 26           | 705                      | 64              | 9                 |

\*Movements (axial/lateral) are not in combination.




### CHARACTERISTICS

- ✓ Carbon steel flanges according to DIN 2573 - PN6
- ✓ Stainless steel rotatable expansion joint AISI 321
- ✓ Max. pressure: 2.5 bar (20°C)
- ✓ Double Ply Bellows material
- ✓ Max. temperature: 550 °C
- ✓ All are stock items
- ✓ Standard length

## TYPE AC16

Compensators with rotatable flanges PN10

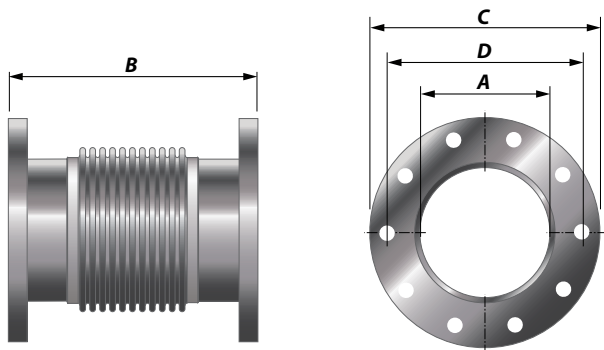

| Article No.  | A Size<br>(Inch) | NB<br>(mm) | Pipe<br>(mm) | B<br>Length<br>(mm) | Flange            |                   |                          | Movements*      |                   |
|--------------|------------------|------------|--------------|---------------------|-------------------|-------------------|--------------------------|-----------------|-------------------|
|              |                  |            |              |                     | C<br>O.D.<br>(mm) | Holes x d<br>(mm) | D<br>Bolt circle<br>(mm) | Axial ±<br>(mm) | Lateral ±<br>(mm) |
| 331415195015 | 1.5              | 40         | 48.3         | 195                 | 150               | 4 x 18            | 110                      | 35              | 18                |
| 331415195020 | 2                | 50         | 60.3         | 195                 | 165               | 4 x 18            | 125                      | 35              | 18                |
| 331415210025 | 2.5              | 65         | 76.1         | 210                 | 185               | 4 x 18            | 145                      | 38              | 16                |
| 331415250030 | 3                | 80         | 88.9         | 250                 | 200               | 8 x 18            | 160                      | 32              | 22                |
| 331415290040 | 4                | 100        | 114.3        | 290                 | 220               | 8 x 18            | 180                      | 32              | 28                |
| 331415305050 | 5                | 125        | 139.7        | 305                 | 250               | 8 x 18            | 210                      | 32              | 22                |
| 331415305060 | 6                | 150        | 168.3        | 305                 | 285               | 8 x 22            | 240                      | 32              | 20                |
| 331415310080 | 8                | 200        | 219.1        | 310                 | 340               | 8 x 22            | 295                      | 32              | 16                |
| 331415320100 | 10               | 250        | 273.0        | 320                 | 395               | 12 x 22           | 350                      | 40              | 17                |
| 331415320120 | 12               | 300        | 323.9        | 320                 | 445               | 12 x 22           | 400                      | 40              | 15                |
| 331415330140 | 14               | 350        | 355.6        | 330                 | 505               | 16 x 22           | 460                      | 40              | 14                |
| 331415340160 | 16               | 400        | 406.4        | 340                 | 565               | 16 x 26           | 515                      | 64              | 13                |
| 331415340180 | 18               | 450        | 457.2        | 340                 | 615               | 20 x 26           | 565                      | 64              | 11                |
| 331415340200 | 20               | 500        | 508.0        | 340                 | 670               | 20 x 26           | 620                      | 64              | 10                |
| 331415350240 | 24               | 600        | 609.6        | 350                 | 780               | 20 x 30           | 725                      | 64              | 9                 |

\*Movements (axial/lateral) are not in combination.




## CHARACTERISTICS

- ✓ Carbon steel flanges according to DIN 2576 - PN10
- ✓ Stainless steel rotatable expansion joint AISI 321
- ✓ Max. pressure: 2.5 bar (20°C)
- ✓ Double Ply Bellows material
- ✓ Max. temperature: 550 °C
- ✓ All are stock items
- ✓ Standard length

## TYPE AC17

Compensators with rotatable flanges DIN86044

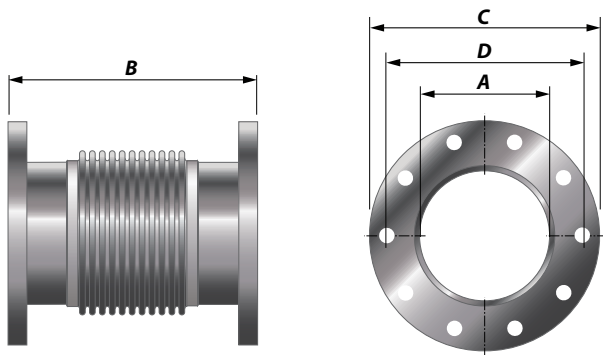

| Article No.  | A Size<br>(Inch) | NB<br>(mm) | Pipe<br>(mm) | B<br>Length<br>(mm) | Flange            |                   |                          | Movements*      |                   |
|--------------|------------------|------------|--------------|---------------------|-------------------|-------------------|--------------------------|-----------------|-------------------|
|              |                  |            |              |                     | C<br>O.D.<br>(mm) | Holes x d<br>(mm) | D<br>Bolt circle<br>(mm) | Axial ±<br>(mm) | Lateral ±<br>(mm) |
| 33145195015  | 1.5              | 40         | 48.3         | 195                 | 130               | 4 x 14            | 100                      | 35              | 18                |
| 331405195020 | 2                | 50         | 60.3         | 195                 | 140               | 4 x 14            | 110                      | 35              | 18                |
| 331405210025 | 2.5              | 65         | 76.1         | 210                 | 160               | 4 x 14            | 130                      | 38              | 16                |
| 331405250030 | 3                | 80         | 88.9         | 250                 | 190               | 4 x 18            | 150                      | 32              | 22                |
| 331405290040 | 4                | 100        | 114.3        | 290                 | 210               | 4 x 18            | 170                      | 32              | 28                |
| 331405305050 | 5                | 125        | 139.7        | 305                 | 240               | 8 x 18            | 200                      | 32              | 22                |
| 331405305060 | 6                | 150        | 168.3        | 305                 | 265               | 8 x 18            | 225                      | 32              | 20                |
| 331405310080 | 8                | 200        | 219.1        | 310                 | 320               | 8 x 18            | 280                      | 32              | 16                |
| 331405320100 | 10               | 250        | 273.0        | 320                 | 375               | 12 x 18           | 335                      | 40              | 17                |
| 331405320120 | 12               | 300        | 323.9        | 320                 | 440               | 12 x 22           | 395                      | 40              | 15                |
| 331405330140 | 14               | 350        | 355.6        | 330                 | 490               | 12 x 22           | 445                      | 40              | 14                |
| 331405340160 | 16               | 400        | 406.4        | 340                 | 540               | 16 x 22           | 495                      | 64              | 13                |
| 331405340180 | 18               | 450        | 457.2        | 340                 | 595               | 16 x 22           | 550                      | 64              | 11                |
| 331405340200 | 20               | 500        | 508.0        | 340                 | 645               | 20 x 22           | 600                      | 64              | 10                |
| 331405350240 | 24               | 600        | 609.6        | 350                 | 755               | 20 x 26           | 705                      | 64              | 9                 |

\*Movements (axial/lateral) are not in combination.




### CHARACTERISTICS

- ✓ Carbon steel flanges according to DIN 86044
- ✓ Stainless steel rotatable expansion joint AISI 321
- ✓ Max. pressure: 2.5 bar (20°C)
- ✓ Double Ply Bellows material
- ✓ Max. temperature: 550°C
- ✓ All are stock items
- ✓ Standard length

## TYPE AC18

Double Compensators with rotatable flanges PN6

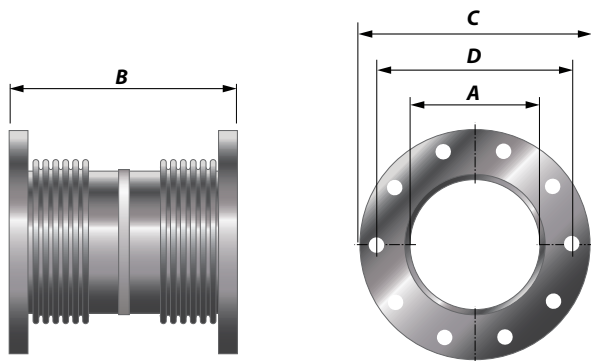

| Article No.  | A Size<br>(Inch) | NB<br>(mm) | Pipe<br>(mm) | B<br>Length<br>(mm) | Flange            |                   |                          | Movements*      |                   |
|--------------|------------------|------------|--------------|---------------------|-------------------|-------------------|--------------------------|-----------------|-------------------|
|              |                  |            |              |                     | C<br>O.D.<br>(mm) | Holes x d<br>(mm) | D<br>Bolt circle<br>(mm) | Axial ±<br>(mm) | Lateral ±<br>(mm) |
| 331605400030 | 3                | 80         | 88.9         | 400                 | 200               | 8 x 18            | 160                      | 80              | 35                |
| 331605400040 | 4                | 100        | 114.3        | 400                 | 220               | 8 x 18            | 180                      | 69              | 40                |
| 331605400050 | 5                | 125        | 139.7        | 400                 | 250               | 8 x 18            | 210                      | 70              | 60                |
| 331605500060 | 6                | 150        | 168.3        | 500                 | 285               | 8 x 22            | 240                      | 75              | 70                |
| 331605500080 | 8                | 200        | 219.1        | 500                 | 320               | 8 x 18            | 280                      | 75              | 70                |
| 331605500100 | 10               | 250        | 273.0        | 500                 | 375               | 12 x 18           | 335                      | 55              | 32                |
| 331605500120 | 12               | 300        | 323.9        | 500                 | 440               | 12 x 22           | 395                      | 64              | 43                |
| 331605500140 | 14               | 350        | 355.6        | 500                 | 490               | 12 x 22           | 445                      | 64              | 39                |
| 331605600160 | 16               | 400        | 406.4        | 600                 | 540               | 16 x 22           | 495                      | 90              | 75                |
| 331605600180 | 18               | 450        | 457.2        | 600                 | 595               | 16 x 22           | 550                      | 90              | 69                |
| 331605600200 | 20               | 500        | 508.0        | 600                 | 645               | 20 x 22           | 600                      | 90              | 62                |
| 331605600240 | 24               | 600        | 609.6        | 600                 | 754               | 20 x 22           | 700                      | 90              | 52                |
| 331605600280 | 28               | 700        | 711.2        | 600                 | 856               | 24 x 22           | 800                      | 90              | 45                |
| 331605600320 | 32               | 800        | 812.8        | 600                 | 958               | 24 x 22           | 900                      | 90              | 39                |
| 331605600360 | 36               | 900        | 914.4        | 600                 | 1060              | 28 x 22           | 1010                     | 90              | 35                |
| 331605600400 | 40               | 1000       | 1016.0       | 600                 | 1162              | 32 x 22           | 1110                     | 90              | 31                |

\*Movements (axial/lateral) are not in combination.




## CHARACTERISTICS

- ✓ Stainless steel expansion joint AISI321
- ✓ Alternative flange dimensions available
- ✓ With rotatable flanges according to DIN2573 - PN6
- ✓ Supplied at pre-stressed length
- ✓ Max. Pressure: 2.5 bar (20°C)
- ✓ Single ply bellows material
- ✓ Max. Temperature: 550°C
- ✓ Twin bellows construction
- ✓ All are stock items
- ✓ Long length

## TYPE AC19

Double Compensators with rotatable flanges PN10

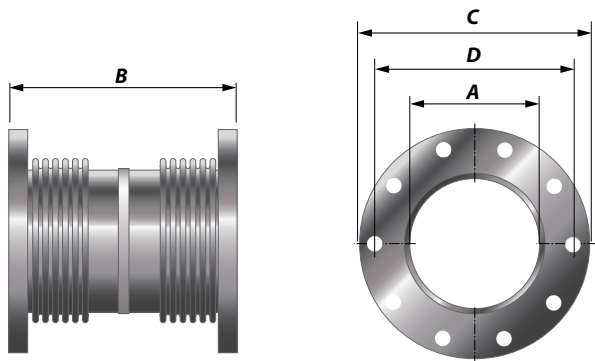

| Article No.  | A Size<br>(Inch) | NB<br>(mm) | Pipe<br>(mm) | B<br>Length<br>(mm) | Flange            |                   |                          | Movements*      |                   |
|--------------|------------------|------------|--------------|---------------------|-------------------|-------------------|--------------------------|-----------------|-------------------|
|              |                  |            |              |                     | C<br>O.D.<br>(mm) | Holes x d<br>(mm) | D<br>Bolt circle<br>(mm) | Axial ±<br>(mm) | Lateral ±<br>(mm) |
| 331615400030 | 3                | 80         | 88.9         | 400                 | 200               | 8 x 18            | 160                      | 80              | 35                |
| 331615400040 | 4                | 100        | 114.3        | 400                 | 220               | 8 x 18            | 180                      | 69              | 40                |
| 331615400050 | 5                | 125        | 139.7        | 400                 | 250               | 8 x 18            | 210                      | 70              | 60                |
| 331615500060 | 6                | 150        | 168.3        | 500                 | 285               | 8 x 22            | 240                      | 75              | 70                |
| 331615500080 | 8                | 200        | 219.1        | 500                 | 320               | 8 x 18            | 280                      | 75              | 70                |
| 331615500100 | 10               | 250        | 273.0        | 500                 | 375               | 12 x 18           | 335                      | 55              | 32                |
| 331615500120 | 12               | 300        | 323.9        | 500                 | 440               | 12 x 22           | 395                      | 64              | 43                |
| 331615500140 | 14               | 350        | 355.6        | 500                 | 490               | 12 x 22           | 445                      | 64              | 39                |
| 331615600160 | 16               | 400        | 406.4        | 600                 | 540               | 16 x 22           | 495                      | 90              | 75                |
| 331615600180 | 18               | 450        | 457.2        | 600                 | 595               | 16 x 22           | 550                      | 90              | 69                |
| 331615600200 | 20               | 500        | 508.0        | 600                 | 645               | 20 x 22           | 600                      | 90              | 62                |
| 331615600240 | 24               | 600        | 609.6        | 600                 | 754               | 20 x 22           | 700                      | 90              | 52                |
| 331615600280 | 28               | 700        | 711.2        | 600                 | 856               | 24 x 22           | 800                      | 90              | 45                |
| 331615600320 | 32               | 800        | 812.8        | 600                 | 958               | 24 x 22           | 900                      | 90              | 39                |
| 331615600360 | 36               | 900        | 914.4        | 600                 | 1060              | 28 x 22           | 1010                     | 90              | 35                |
| 331615600400 | 40               | 1000       | 1016.0       | 600                 | 1162              | 32 x 22           | 1110                     | 90              | 31                |

\*Movements (axial/lateral) are not in combination.




## CHARACTERISTICS

- ✓ Stainless steel expansion joint AISI321
- ✓ Alternative flange dimensions available
- ✓ With rotatable flanges according to DIN2573 - PN10
- ✓ Supplied at pre-stressed length
- ✓ Max. Pressure: 2.5 bar (20°C)
- ✓ Single ply bellows material
- ✓ Max. Temperature: 550°C
- ✓ Twin bellows construction
- ✓ All are stock items
- ✓ Long length



## TYPE AC20

Double Compensators with rotatable flanges DIN86044

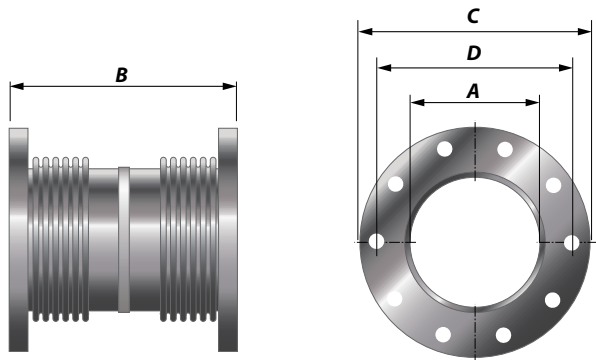

| Article No.  | A Size<br>(Inch) | NB<br>(mm) | Pipe<br>(mm) | B<br>Length<br>(mm) | Flange            |                   |                          | Movements*      |                   |
|--------------|------------------|------------|--------------|---------------------|-------------------|-------------------|--------------------------|-----------------|-------------------|
|              |                  |            |              |                     | C<br>O.D.<br>(mm) | Holes x d<br>(mm) | D<br>Bolt circle<br>(mm) | Axial ±<br>(mm) | Lateral ±<br>(mm) |
| 331625400030 | 3                | 80         | 88.9         | 400                 | 200               | 8 x 18            | 160                      | 80              | 35                |
| 331625400040 | 4                | 100        | 114.3        | 400                 | 220               | 8 x 18            | 180                      | 69              | 40                |
| 331625400050 | 5                | 125        | 139.7        | 400                 | 250               | 8 x 18            | 210                      | 70              | 60                |
| 331625500060 | 6                | 150        | 168.3        | 500                 | 285               | 8 x 22            | 240                      | 75              | 70                |
| 331625500080 | 8                | 200        | 219.1        | 500                 | 320               | 8 x 18            | 280                      | 75              | 70                |
| 331625500100 | 10               | 250        | 273.0        | 500                 | 375               | 12 x 18           | 335                      | 55              | 32                |
| 331625500120 | 12               | 300        | 323.9        | 500                 | 440               | 12 x 22           | 395                      | 64              | 43                |
| 331625500140 | 14               | 350        | 355.6        | 500                 | 490               | 12 x 22           | 445                      | 64              | 39                |
| 331625600160 | 16               | 400        | 406.4        | 600                 | 540               | 16 x 22           | 495                      | 90              | 75                |
| 331625600180 | 18               | 450        | 457.2        | 600                 | 595               | 16 x 22           | 550                      | 90              | 69                |
| 331625600200 | 20               | 500        | 508.0        | 600                 | 645               | 20 x 22           | 600                      | 90              | 62                |
| 331625600240 | 24               | 600        | 609.6        | 600                 | 754               | 20 x 22           | 700                      | 90              | 52                |
| 331625600280 | 28               | 700        | 711.2        | 600                 | 856               | 24 x 22           | 800                      | 90              | 45                |
| 331625600320 | 32               | 800        | 812.8        | 600                 | 958               | 24 x 22           | 900                      | 90              | 39                |
| 331625600360 | 36               | 900        | 914.4        | 600                 | 1060              | 28 x 22           | 1010                     | 90              | 35                |
| 331625600400 | 40               | 1000       | 1016.0       | 600                 | 1162              | 32 x 22           | 1110                     | 90              | 31                |

\*Movements (axial/lateral) are not in combination.





## CHARACTERISTICS

- ✓ Stainless steel expansion joint AISI321
- ✓ Alternative flange dimensions available
- ✓ With rotatable flanges according to DIN 86044
- ✓ Supplied at pre-stressed length
- ✓ Max. Pressure: 2.5 bar (20°C)
- ✓ Single ply bellows material
- ✓ Max. Temperature: 550°C
- ✓ Twin bellows construction
- ✓ All are stock items
- ✓ Long length

## TYPE AC21

Compensators with stainless steel welded ends



| Article No.  | A Size<br>(inch) | NB<br>(mm) | Pipe<br>(mm) | B<br>(mm) | Movements        |                    |
|--------------|------------------|------------|--------------|-----------|------------------|--------------------|
|              |                  |            |              |           | Axial $\pm$ (mm) | Lateral $\pm$ (mm) |
| 322085160015 | 1.5              | 40         | 48.3         | 245       | 24               | 18                 |
| 322085160012 | 2                | 50         | 60.3         | 245       | 30               | 18                 |
| 322085160025 | 2.5              | 65         | 76.1         | 245       | 32               | 16                 |
| 322085160030 | 3                | 80         | 88.9         | 245       | 20               | 22                 |
| 322085160040 | 4                | 100        | 114.3        | 245       | 38               | 28                 |
| 322085160050 | 5                | 125        | 139.7        | 245       | 38               | 22                 |
| 322085160060 | 6                | 150        | 168.3        | 245       | 37               | 20                 |
| 322085160080 | 8                | 200        | 219.1        | 245       | 38               | 16                 |
| 322085160100 | 10               | 250        | 273.0        | 245       | $\pm 38$         | 17                 |




### CHARACTERISTICS

- ✓ Stainless steel expansion joint: AISI321
- ✓ **Stainless steel welded ends**
- ✓ Max. pressure: 2.5 bar (20°C)
- ✓ Double Ply Bellows material
- ✓ Max. temperature: 550°C
- ✓ All are stock items
- ✓ Standard length

## TYPE AC22

Compact Compensators with welded ends

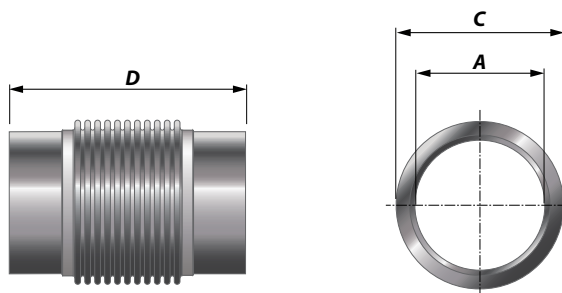

| Article No.  | A Size<br>(inch) | NB<br>(mm) | Pipe<br>(mm) | D<br>(mm) | C<br>(mm) | Movements       |                   | Springrate      |                   |
|--------------|------------------|------------|--------------|-----------|-----------|-----------------|-------------------|-----------------|-------------------|
|              |                  |            |              |           |           | Axial ±<br>(mm) | Lateral ±<br>(mm) | Axial ±<br>(mm) | Lateral ±<br>(mm) |
| 322085150015 | 1.5              | 40         | 48.3         | 150       | 60.3      | 25              | 8                 | 47              | 89                |
| 322085150020 | 2                | 50         | 60.3         | 150       | 78.3      | 25              | 8                 | 68              | 166               |
| 322085150025 | 2.5              | 65         | 76.1         | 150       | 96.7      | 25              | 8                 | 56              | 169               |
| 322085150030 | 3                | 80         | 88.9         | 150       | 109.7     | 25              | 8                 | 63              | 219               |
| 322085150040 | 4                | 100        | 114.3        | 150       | 140.5     | 25              | 6                 | 59              | 293               |
| 322085150050 | 5                | 125        | 139.7        | 150       | 165.7     | 25              | 5                 | 71              | 420               |
| 322085150060 | 6                | 150        | 168.3        | 150       | 200.5     | 25              | 5                 | 56              | 389               |
| 322085150080 | 8                | 200        | 219.1        | 150       | 251.1     | 25              | 5                 | 69              | 608               |
| 322085150100 | 10               | 250        | 273.0        | 150       | 305.2     | 25              | 4                 | 86              | 933               |
| 322085150120 | 12               | 300        | 323.9        | 150       | 360.9     | 25              | 4                 | 81              | 1042              |



### CHARACTERISTICS

- ✓ Stainless steel expansion joint AISI 321
- ✓ Max. pressure: 2.5 bar (20°C)
- ✓ Double ply bellows material
- ✓ Max. temperature: 550°C
- ✓ Carbon steel weld ends
- ✓ All are stock items
- ✓ Compact Line