




FLANGES



AXCES

FLANGE TYPE DIN 2573 - PN6

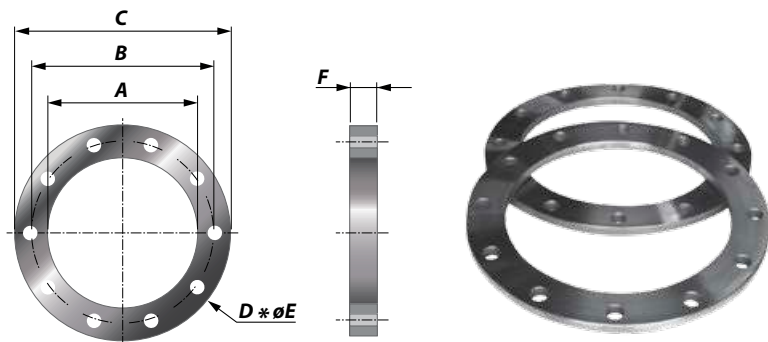

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
212000120010	1	25	33.4	35	75	100	4	11	12	1
212000120013	1.25	32	42.2	43	90	120	4	14	12	1
212000120015	1.5	40	48.3	49	100	130	4	14	12	1
212000120020	2	50	60.3	61	110	140	4	14	12	2
212000120025	2.5	65	76.1	73	130	160	4	14	12	2
212000120030	3	80	88.9	90	150	190	4	18	12	2
212000120040	4	100	114.3	116	170	210	4	18	12	2
212000160050	5	125	139.7	142	200	240	8	18	16	4
212000160060	6	150	168.3	171	225	265	8	18	16	4
212000160080	8	200	219.1	222	280	320	8	18	16	5
212000160100	10	250	273.0	276	335	375	12	18	16	6
212000160120	12	300	323.9	327	395	440	12	22	16	8
212000160140	14	350	355.6	360	445	490	12	22	16	10
212000160160	16	400	406.4	411	495	540	16	22	16	11
212000160180	18	450	457.2	461	550	595	16	22	16	13
212000200200	20	500	508.0	512	600	645	20	22	16	14
212000200240	24	600	609.6	614	705	755	20	26	20	22
212000200280	28	700	711.2	716	810	860	24	26	20	25
212000200320	32	800	812.8	818	920	975	24	30	20	31
212000200360	36	900	914.4	920	1020	1075	24	30	20	35
212000200400	40	1000	1016.0	1022	1120	1022	28	30	20	38

CHARACTERISTICS

Flanges Hole pattern according type DIN 2573 - PN6


Material Flanges are produced out of Steel S235JRG2

Range Diameter range from 33.4 mm up to 1016 mm

Thickness From minimum 12 mm up to maximum 20 mm

Temperature The maximum allowable temperature is 600°C

FLANGE TYPE DIN 2576 - PN10

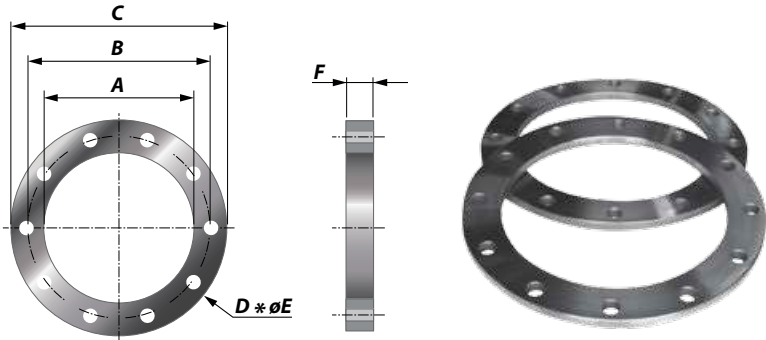

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
212010120010	1	25	33.4	35	85	115	4	14	12	1
212010120013	1.25	32	42.2	43	100	140	4	18	12	1
212010120015	1.5	40	48.3	49	110	150	4	18	12	1
212010120020	2	50	60.3	61	125	165	4	18	12	2
212010120025	2.5	65	76.1	73	145	185	4	18	12	2
212010120030	3	80	88.9	90	160	200	4	18	12	2
212010120040	4	100	114.3	116	180	220	4	18	12	2
212010160050	5	125	139.7	142	210	250	8	18	16	4
212010160060	6	150	168.3	171	240	285	8	22	16	4
212010160080	8	200	219.1	222	295	340	8	22	16	5
212010160100	10	250	273.0	276	350	395	12	22	16	6
212010160120	12	300	323.9	327	400	445	12	22	16	8
212010200140	14	350	355.6	360	460	505	12	22	16	10
212010200160	16	400	406.4	411	515	565	16	26	16	11
212010200180	18	450	457.2	461	565	615	16	26	16	13
212010200200	20	500	508.0	512	620	670	20	26	16	14
212010200240	24	600	609.6	614	725	780	20	30	20	22
212010200280	28	700	711.2	716	840	895	24	30	20	25
212010200320	32	800	812.8	818	950	1015	24	33	20	31
212010200360	36	900	914.4	920	1050	1115	24	33	20	35
212010200400	40	1000	1016.0	1022	1160	1230	28	36	20	38

CHARACTERISTICS

Flanges Hole pattern according type DIN 2576 - PN10


Material Flanges are produced out of Steel S235JRG2

Range Diameter range from 33.4 mm up to 1016 mm

Thickness From minimum 12 mm up to maximum 20 mm

Temperature The maximum allowable temperature is 600°C

FLANGE TYPE DIN 86044

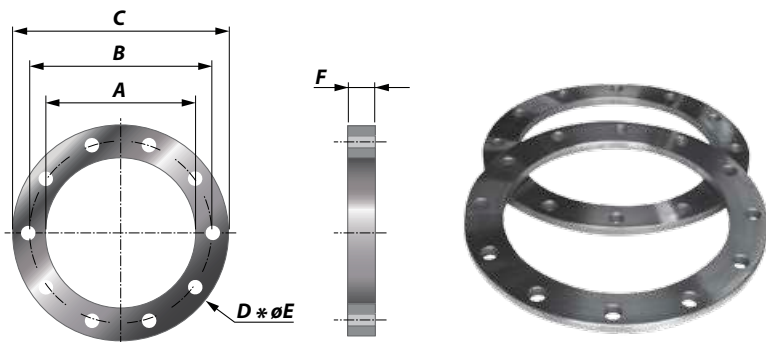

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
212020160100	10	250	273.0	276	335	375	12	18	16	6
212020160120	12	300	323.9	327	395	440	12	22	16	8
212020160140	14	350	355.6	360	445	490	12	22	16	10
212020160160	16	400	406.4	411	495	540	16	22	16	11
212020160180	18	450	457.2	461	550	595	16	22	16	13
212020160200	20	500	508.0	512	600	645	20	22	16	14
212020200220	22	550	560.0	563	650	703	20	22	20	20
212020200240	24	600	609.6	614	700	754	20	22	20	22
212020200260	26	650	664.0	665	750	805	20	22	20	24
212020200280	28	700	711.2	716	800	856	24	22	20	25
212020200300	30	750	762.0	767	860	907	24	22	20	27
212020200320	32	800	812.8	818	900	958	24	22	20	29
212020200360	36	900	914.4	920	1010	1060	28	22	20	32
212020200380	38	950	698.0	970	1060	1110	28	22	20	34
212020200400	40	1000	1016.0	1022	1110	1167	32	22	20	36
212020200440	44	1100	1120.0	1126	1210	1266	32	22	20	39
212020200480	48	1200	1220.0	1226	1310	1366	36	22	20	42
212020200520	52	1300	1324.0	1326	1410	1466	40	22	20	45

CHARACTERISTICS

Flanges Hole pattern according type DIN 86044


Material Flanges are produced out of Steel S235JRG2

Range Diameter range from 273 mm up to 1324 mm

Thickness From minimum 16 mm up to maximum 20 mm

Temperature The maximum allowable temperature is 600°C

FLANGE TYPE ANSI 150

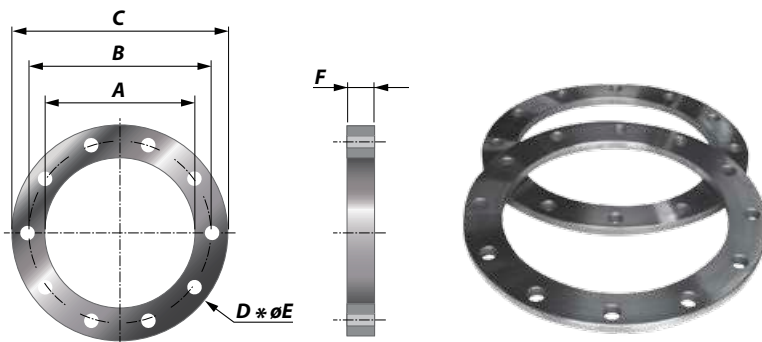

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
212030150010	1	25	33.4	35	79	110	4	16	15	1
212030160013	1.25	32	42.2	43	89	120	4	16	16	1
212030180015	1.5	40	48.3	49	99	130	4	16	18	1
212030200020	2	50	60.3	61	121	150	4	19	20	2
212030230025	2.5	65	76.1	73	140	180	4	19	23	4
212030240030	3	80	88.9	90	153	190	4	19	24	4
212030240040	4	100	114.3	116	191	230	8	19	24	6
212030240050	5	125	139.7	142	216	255	8	22	24	6
212030260060	6	150	168.3	171	242	280	8	22	26	8
212030290080	8	200	219.1	222	299	345	8	22	29	13
212030310100	10	250	273.0	276	362	405	12	26	31	17
212030320120	12	300	323.9	327	432	485	12	26	32	27
212030350140	14	350	355.6	360	476	535	12	30	35	35
212030370160	16	400	406.4	411	540	600	16	30	37	42
212030400180	18	450	457.2	461	578	635	16	33	40	53
212030430200	20	500	508.0	512	635	700	20	33	43	65
212030480240	24	600	609.6	614	750	815	20	36	48	92

CHARACTERISTICS

Flanges Hole pattern according type ANSI 150 Standard


Material Flanges are produced out of Steel S235JRG2

Range Diameter range from 33.4 mm up to 609.6 mm

Thickness From minimum 15 mm up to maximum 48 mm

Temperature The maximum allowable temperature is 600°C

FLANGE TYPE JIS B2220 - 5K

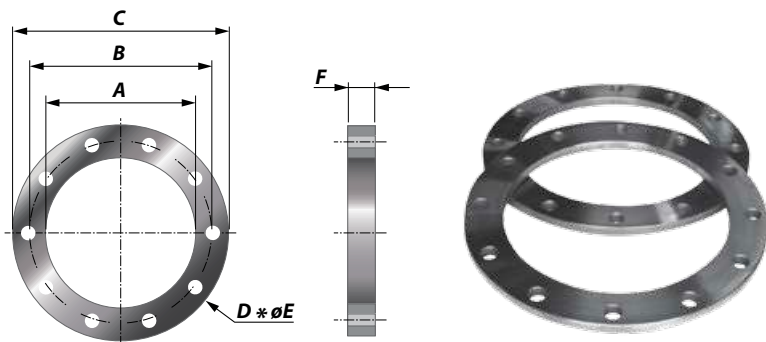

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
212040100010	1	25	33.4	35	75	95	4	12	10	1
212040100013	1.25	32	42.2	43	90	115	4	15	12	1
212040100015	1.5	40	48.3	49	95	120	4	15	12	1
212040140020	2	50	60.3	61	105	130	4	15	14	1
212040140025	2.5	65	76.1	77	130	155	4	15	14	2
212040140030	3	80	88.9	90	145	180	4	19	14	2
212040160040	4	100	114.3	116	165	200	8	19	16	2
212040160050	5	125	139.7	142	200	235	8	19	16	3
212040180060	6	150	168.3	167	230	265	8	19	18	4
212040200080	8	200	219.1	218	280	320	8	23	20	6
212040220100	10	250	273.0	270	345	385	12	23	22	9
212040220120	12	300	323.9	321	390	430	12	23	22	10
212040240140	14	350	355.6	358	435	480	12	25	24	14
212040240160	16	400	406.4	409	495	540	16	25	24	17
212040240180	18	450	457.2	460	555	605	16	25	24	22
212040240200	20	500	508.0	511	605	655	20	25	24	23
212040260240	24	600	609.6	613	715	770	20	27	26	32
212040260280	28	700	711.2	715	820	875	24	27	26	38
212040280320	32	800	812.8	817	930	995	24	33	28	52
212040300360	36	900	914.4	919	1030	1095	24	33	30	61
212040320400	40	1000	1016.0	1021	1130	1195	28	33	32	71

CHARACTERISTICS

Flanges Hole pattern according type JIS Standard

Material Flanges are produced out of Steel S235JRG2

Range Diameter range from 33.4 mm up to 1016 mm

Thickness From minimum 10 mm up to maximum 32 mm

Temperature The maximum allowable temperature is 600°C