


GASKETS



GRAPHITE GASKET TYPE FULL FACE DIN 2573 - PN6

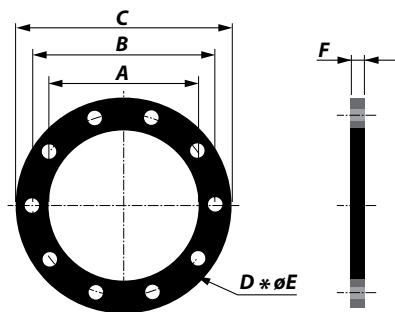

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
213100020010	1	25	33.4	35	75	100	4	11	2	0.1
213100020013	1.25	32	42.2	43	90	120	4	14	2	0.1
213100020015	1.5	40	48.3	49	100	130	4	14	2	0.1
213100020020	2	50	60.3	61	110	140	4	14	2	0.1
213100020025	2.5	65	76.1	73	130	160	4	14	2	0.2
213100020030	3	80	88.9	90	150	190	4	18	2	0.2
213100020040	4	100	114.3	116	170	210	4	18	2	0.2
213100020050	5	125	139.7	142	200	240	8	18	2	0.2
213100020060	6	150	168.3	171	225	265	8	18	2	0.3
213100020080	8	200	219.1	222	280	320	8	18	2	0.3
213100020100	10	250	273.0	276	335	375	12	18	2	0.3
213100020120	12	300	323.9	327	395	440	12	22	2	0.3
213100020140	14	350	355.6	360	445	490	12	22	2	0.4
213100020160	16	400	406.4	411	495	540	16	22	2	0.4
213100020180	18	450	457.2	461	550	595	16	22	2	0.4
213100020200	20	500	508.0	512	600	645	20	22	2	0.5
213100020240	24	600	609.6	614	705	755	20	26	2	0.8
213100020280	28	700	711.2	716	810	860	24	26	2	0.8
213100020320	32	800	812.8	818	920	975	24	30	2	0.8
213100020360	36	900	914.4	920	1020	1075	24	30	2	1
213100020400	40	1000	1016.0	1022	1120	1022	28	30	2	1

CHARACTERISTICS

Gaskets Hole pattern according type DIN 2573 - PN6


Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE FULL FACE DIN 2576 - PN10

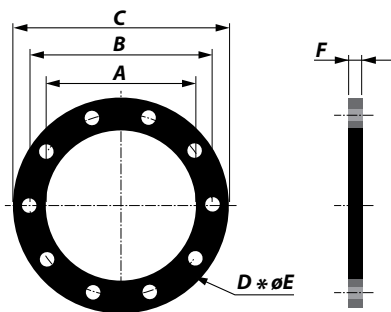

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
213110020010	1	25	33.4	35	85	115	4	14	2	0.1
213110020013	1.25	32	42.2	43	100	140	4	18	2	0.1
213110020015	1.5	40	48.3	49	110	150	4	18	2	0.1
213110020020	2	50	60.3	61	125	165	4	18	2	0.1
213110020025	2.5	65	76.1	73	145	185	4	18	2	0.2
213110020030	3	80	88.9	90	160	200	4	18	2	0.2
213110020040	4	100	114.3	116	180	220	4	18	2	0.2
213110020050	5	125	139.7	142	210	250	8	18	2	0.2
213110020060	6	150	168.3	171	240	285	8	22	2	0.3
213110020080	8	200	219.1	222	295	340	8	22	2	0.3
213110020100	10	250	273.0	276	350	395	12	22	2	0.3
213110020120	12	300	323.9	327	400	445	12	22	2	0.3
213110020140	14	350	355.6	360	460	505	12	22	2	0.4
213110020160	16	400	406.4	411	515	565	16	26	2	0.4
213110020180	18	450	457.2	461	565	615	16	26	2	0.4
213110020200	20	500	508.0	512	620	670	20	26	2	0.5
213110020240	24	600	609.6	614	725	780	20	30	2	0.8
213110020280	28	700	711.2	716	840	895	24	30	2	0.8
213110020320	32	800	812.8	818	950	1015	24	33	2	0.8
213110020360	36	900	914.4	920	1050	1115	24	33	2	1
213110020400	40	1000	1016.0	1022	1160	1230	28	36	2	1

CHARACTERISTICS

Gaskets Hole pattern according type DIN 2576 - PN10


Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE FULL FACE DIN 86044

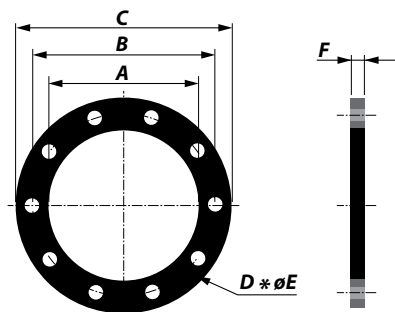

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
213120020100	10	250	273.0	276	335	375	12	18	2	0.3
213120020120	12	300	323.9	327	395	440	12	22	2	0.3
213120020140	14	350	355.6	360	445	490	12	22	2	0.4
213120020160	16	400	406.4	411	495	540	16	22	2	0.4
213120020180	18	450	457.2	461	550	595	16	22	2	0.4
213120020200	20	500	508.0	512	600	645	20	22	2	0.5
213120020220	22	550	560.0	563	650	703	20	22	2	0.5
213120020240	24	600	609.6	614	700	754	20	22	2	0.8
213120020260	26	650	664.0	665	750	805	20	22	2	0.8
213120020280	28	700	711.2	716	800	856	24	22	2	0.8
213120020300	30	750	762.0	767	860	907	24	22	2	0.8
213120020320	32	800	812.8	818	900	958	24	22	2	0.8
213120020360	36	900	914.4	920	1010	1060	28	22	2	1
213120020380	38	950	998.0	970	1060	1110	28	22	2	1
213120020400	40	1000	1016.0	1022	1110	1167	32	22	2	1
213120020440	44	1100	1120.0	1126	1210	1266	32	22	2	1
213120020480	48	1200	1220.0	1226	1310	1366	36	22	2	1
213120020520	52	1300	1324.0	1326	1410	1466	40	22	2	1

CHARACTERISTICS

Gaskets Hole pattern according type DIN 86044


Material Gaskets are produced out of graphite

Range Diameter range from 273 mm up to 1324 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE FULL FACE ANSI 150

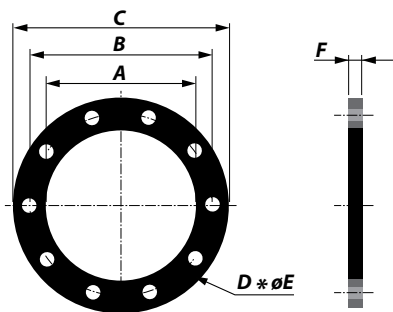

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
213130020010	1	25	33.4	35	79	110	4	16	2	0.1
213130020013	1.25	32	42.2	43	89	120	4	16	2	0.1
213130020015	1.5	40	48.3	49	99	130	4	16	2	0.1
213130020020	2	50	60.3	61	121	150	4	19	2	0.1
213130020025	2.5	65	76.1	73	140	180	4	19	2	0.2
213130020030	3	80	88.9	90	153	190	4	19	2	0.2
213130020040	4	100	114.3	116	191	230	8	19	2	0.2
213130020050	5	125	139.7	142	216	255	8	22	2	0.2
213130020060	6	150	168.3	171	242	280	8	22	2	0.3
213130020080	8	200	219.1	222	299	345	8	22	2	0.3
213130020100	10	250	273.0	276	362	405	12	26	2	0.3
213130020120	12	300	323.9	327	432	485	12	26	2	0.3
213130020140	14	350	355.6	360	476	535	12	30	2	0.4
213130020160	16	400	406.4	411	540	600	16	30	2	0.4
213130020180	18	450	457.2	461	578	635	16	33	2	0.4
213130020200	20	500	508.0	512	635	700	20	33	2	0.5
213130020240	24	600	609.6	614	750	815	20	36	2	0.8

CHARACTERISTICS

Gaskets Hole pattern according type ANSI 150 Standard


Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 609.6 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE FULL FACE JIS B2220 - 5K

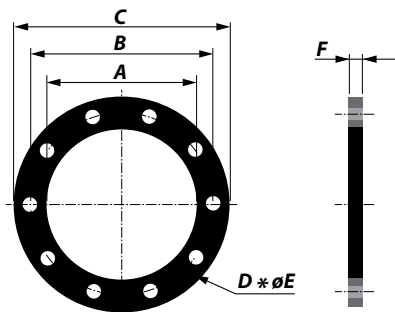

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
213140020010	1	25	33.4	35	75	95	4	12	2	0.1
213140020013	1.25	32	42.2	43	90	115	4	15	2	0.1
213140020015	1.5	40	48.3	49	95	120	4	15	2	0.1
213140020020	2	50	60.3	61	105	130	4	15	2	0.1
213140020025	2.5	65	76.1	77	130	155	4	15	2	0.2
213140020030	3	80	88.9	90	145	180	4	19	2	0.2
213140020040	4	100	114.3	116	165	200	8	19	2	0.2
213140020050	5	125	139.7	142	200	235	8	19	2	0.2
213140020060	6	150	168.3	167	230	265	8	19	2	0.3
213140020080	8	200	219.1	218	280	320	8	23	2	0.3
213140020100	10	250	273.0	270	345	385	12	23	2	0.3
213140020120	12	300	323.9	321	390	430	12	23	2	0.3
213140020140	14	350	355.6	358	435	480	12	25	2	0.4
213140020160	16	400	406.4	409	495	540	16	25	2	0.4
213140020180	18	450	457.2	460	555	605	16	25	2	0.4
213140020200	20	500	508.0	511	605	655	20	25	2	0.5
213140020240	24	600	609.6	613	715	770	20	27	2	0.8
213140020280	28	700	711.2	715	820	875	24	27	2	0.8
213140020320	32	800	812.8	817	930	995	24	33	2	0.8
213140020360	36	900	914.4	919	1030	1095	24	33	2	1
213140020400	40	1000	1016.0	1021	1130	1195	28	33	2	1

CHARACTERISTICS

Gaskets Hole pattern according type JIS Standard


Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE FULL FACE JIS B2220 - 10K

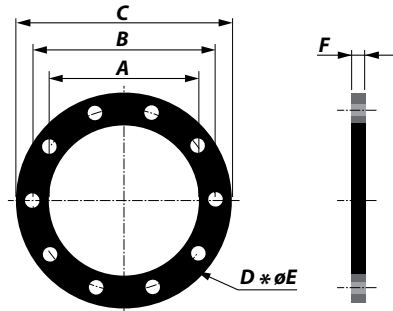

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
213150020010	1	25	34.5	35	90	125	4	19	2	0.1
213150020013	1.25	32	43.2	43	100	135	4	19	2	0.1
213150020015	1.5	40	49.1	49	105	140	4	19	2	0.1
213150020020	2	50	61.1	61	120	155	4	19	2	0.1
213150020025	2.5	65	77.1	77	140	175	4	19	2	0.2
213150020030	3	80	90.0	90	150	185	8	19	2	0.2
213150020040	4	100	115.4	116	175	210	8	19	2	0.2
213150020050	5	125	141.2	142	210	250	8	23	2	0.2
213150020060	6	150	166.6	167	240	280	8	23	2	0.3
213150020080	8	200	218.0	218	290	330	12	23	2	0.3
213150020100	10	250	269.5	270	355	400	12	25	2	0.3
213150020120	12	300	321.0	321	400	445	16	25	2	0.3
213150020140	14	350	358.1	358	445	490	16	25	2	0.4
213150020160	16	400	409.0	409	510	560	16	27	2	0.4
213150020180	18	450	460.0	460	565	620	20	27	2	0.4
213150020200	20	500	511.0	511	620	675	20	27	2	0.5
213150020240	24	600	613.0	613	730	795	24	33	2	0.8
213150020280	28	700	715.0	715	840	905	24	33	2	0.8
213150020320	32	800	817.0	817	950	1020	28	33	2	0.8
213150020360	36	900	919.0	919	1050	1120	28	33	2	1
213150020400	40	1000	1021.0	1021	1160	1235	28	39	2	1

CHARACTERISTICS

Gaskets Hole pattern according type JIS Standard


Material Gaskets are produced out of graphite

Range Diameter range from 34.5 mm up to 1021 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE CIRCULAR DIN 2573 - PN6

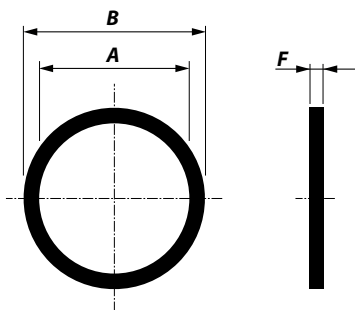

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213300030010	1	25	33.4	35	75	2	0.1
213300030013	1.25	32	42.2	43	90	2	0.1
213300030015	1.5	40	48.3	49	100	2	0.1
213300030020	2	50	60.3	61	110	2	0.1
213300030025	2.5	65	76.1	73	130	2	0.2
213300030030	3	80	88.9	90	150	2	0.2
213300030040	4	100	114.3	116	170	2	0.2
213300030050	5	125	139.7	142	200	2	0.2
213300030060	6	150	168.3	171	225	2	0.3
213300030080	8	200	219.1	222	280	2	0.3
213300030100	10	250	273.0	276	335	2	0.3
213300030120	12	300	323.9	327	395	2	0.3
213300030140	14	350	355.6	360	445	2	0.4
213300030160	16	400	406.4	411	495	2	0.4
213300030180	18	450	457.2	461	550	2	0.4
213300030200	20	500	508.0	512	600	2	0.5
213300030240	24	600	609.6	614	705	2	0.8
213300030280	28	700	711.2	716	810	2	0.8
213300030320	32	800	812.8	818	920	2	0.8
213300030360	36	900	914.4	920	1020	2	1
213300030400	40	1000	1016.0	1022	1120	2	1

CHARACTERISTICS


Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE CIRCULAR DIN 2576 - PN10

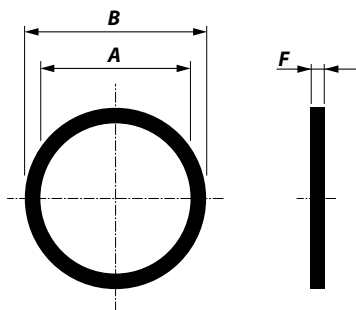

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213310030010	1	25	33.4	35	85	2	0.1
213310030013	1.25	32	42.2	43	100	2	0.1
213310030015	1.5	40	48.3	49	110	2	0.1
213310030020	2	50	60.3	61	125	2	0.1
213310030025	2.5	65	76.1	73	145	2	0.2
213310030030	3	80	88.9	90	160	2	0.2
213310030040	4	100	114.3	116	180	2	0.2
213310030050	5	125	139.7	142	210	2	0.2
213310030060	6	150	168.3	171	240	2	0.3
213310030080	8	200	219.1	222	295	2	0.3
213310030100	10	250	273.0	276	350	2	0.3
213310030120	12	300	323.9	327	400	2	0.3
213310030140	14	350	355.6	360	460	2	0.4
213310030160	16	400	406.4	411	515	2	0.4
213310030180	18	450	457.2	461	565	2	0.4
213310030200	20	500	508.0	512	620	2	0.5
213310030240	24	600	609.6	614	725	2	0.8
213310030280	28	700	711.2	716	840	2	0.8
213310030320	32	800	812.8	818	950	2	0.8
213310030360	36	900	914.4	920	1050	2	1
213310030400	40	1000	1016.0	1022	1160	2	1

CHARACTERISTICS


Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE CIRCULAR DIN 86044

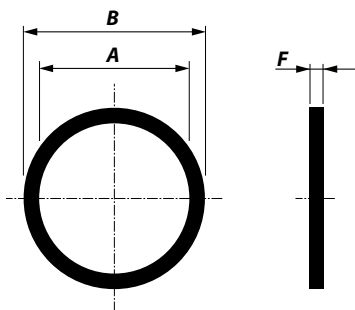

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213320030100	10	250	273.0	276	335	2	0.3
213320030120	12	300	323.9	327	395	2	0.3
213320030140	14	350	355.6	360	445	2	0.4
213320030160	16	400	406.4	411	495	2	0.4
213320030180	18	450	457.2	461	550	2	0.4
213320030200	20	500	508.0	512	600	2	0.5
213320030220	22	550	560.0	563	650	2	0.5
213320030240	24	600	609.6	614	700	2	0.8
213320030260	26	650	664.0	665	750	2	0.8
213320030280	28	700	711.2	716	800	2	0.8
213320030300	30	750	762.0	767	860	2	0.8
213320030320	32	800	812.8	818	900	2	0.8
213320030360	36	900	914.4	920	1010	2	1
213320030380	38	950	998.0	970	1060	2	1
213320030400	40	1000	1016.0	1022	1110	2	1
213320030440	44	1100	1120.0	1126	1210	2	1
213320030480	48	1200	1220.0	1226	1310	2	1
213320030520	52	1300	1324.0	1326	1410	2	1

CHARACTERISTICS


Material Gaskets are produced out of graphite

Range Diameter range from 273 mm up to 1324 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE CIRCULAR ANSI 150

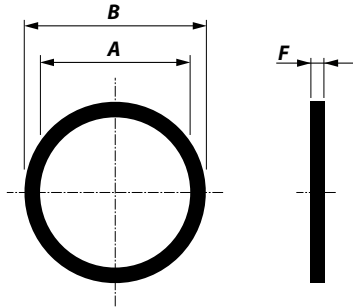

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213330030010	1	25	33.4	35	79	2	0.1
213330030013	1.25	32	42.2	43	89	2	0.1
213330030015	1.5	40	48.3	49	99	2	0.1
213330030020	2	50	60.3	61	121	2	0.1
213330030025	2.5	65	76.1	73	140	2	0.2
213330030030	3	80	88.9	90	153	2	0.2
213330030040	4	100	114.3	116	191	2	0.2
213330030050	5	125	139.7	142	216	2	0.2
213330030060	6	150	168.3	171	242	2	0.3
213330030080	8	200	219.1	222	299	2	0.3
213330030100	10	250	273.0	276	362	2	0.3
213330030120	12	300	323.9	327	432	2	0.3
213330030140	14	350	355.6	360	476	2	0.4
213330030160	16	400	406.4	411	540	2	0.4
213330030180	18	450	457.2	461	578	2	0.4
213330030200	20	500	508.0	512	635	2	0.5
213330030240	24	600	609.6	614	750	2	0.8

CHARACTERISTICS


Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 609.6 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE CIRCULAR JIS B2220 - 5K

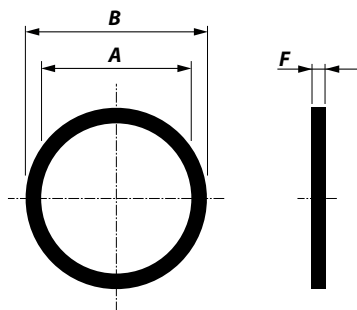

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213340030010	1	25	33.4	35	75	2	0.1
213340030013	1.25	32	42.2	43	90	2	0.1
213340030015	1.5	40	48.3	49	95	2	0.1
213340030020	2	50	60.3	61	105	2	0.1
213340030025	2.5	65	76.1	77	130	2	0.2
213340030030	3	80	88.9	90	145	2	0.2
213340030040	4	100	114.3	116	165	2	0.2
213340030050	5	125	139.7	142	200	2	0.2
213340030060	6	150	168.3	167	230	2	0.3
213340030080	8	200	219.1	218	280	2	0.3
213340030100	10	250	273.0	270	345	2	0.3
213340030120	12	300	323.9	321	390	2	0.3
213340030140	14	350	355.6	358	435	2	0.4
213340030160	16	400	406.4	409	495	2	0.4
213340030180	18	450	457.2	460	555	2	0.4
213340030200	20	500	508.0	511	605	2	0.5
213340030240	24	600	609.6	613	715	2	0.8
213340030280	28	700	711.2	715	820	2	0.8
213340030320	32	800	812.8	817	930	2	0.8
213340030360	36	900	914.4	919	1030	2	1
213340030400	40	1000	1016.0	1021	1130	2	1

CHARACTERISTICS


Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C

GRAPHITE GASKET TYPE CIRCULAR JIS B2220 - 10K

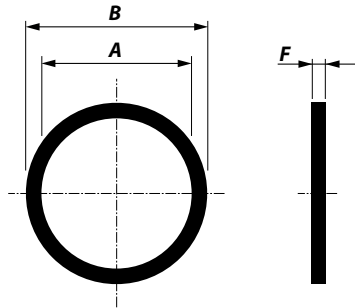

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213350030010	1	25	34.5	35	90	2	0.1
213350030013	1.25	32	43.2	43	100	2	0.1
213350030015	1.5	40	49.1	49	105	2	0.1
213350030020	2	50	61.1	61	120	2	0.1
213350030025	2.5	65	77.1	77	140	2	0.2
213350030030	3	80	90.0	90	150	2	0.2
213350030040	4	100	115.4	116	175	2	0.2
213350030050	5	125	141.2	142	210	2	0.2
213350030060	6	150	166.6	167	240	2	0.3
213350030080	8	200	218.0	218	290	2	0.3
213350030100	10	250	269.5	270	355	2	0.3
213350030120	12	300	321.0	321	400	2	0.3
213350030140	14	350	358.1	358	445	2	0.4
213350030160	16	400	409.0	409	510	2	0.4
213350030180	18	450	460.0	460	565	2	0.4
213350030200	20	500	511.0	511	620	2	0.5
213350030240	24	600	613.0	613	730	2	0.8
213350030280	28	700	715.0	715	840	2	0.8
213350030320	32	800	817.0	817	950	2	0.8
213350030360	36	900	919.0	919	1050	2	1
213350030400	40	1000	1021.0	1021	1160	2	1

CHARACTERISTICS

Material Gaskets are produced out of graphite

Range Diameter range from 34.5 mm up to 1021 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C