


GRAPHITE GASKET TYPE CIRCULAR DIN 2576 - PN10

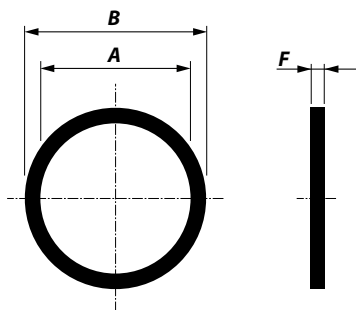

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213310030010	1	25	33.4	35	85	2	0.1
213310030013	1.25	32	42.2	43	100	2	0.1
213310030015	1.5	40	48.3	49	110	2	0.1
213310030020	2	50	60.3	61	125	2	0.1
213310030025	2.5	65	76.1	73	145	2	0.2
213310030030	3	80	88.9	90	160	2	0.2
213310030040	4	100	114.3	116	180	2	0.2
213310030050	5	125	139.7	142	210	2	0.2
213310030060	6	150	168.3	171	240	2	0.3
213310030080	8	200	219.1	222	295	2	0.3
213310030100	10	250	273.0	276	350	2	0.3
213310030120	12	300	323.9	327	400	2	0.3
213310030140	14	350	355.6	360	460	2	0.4
213310030160	16	400	406.4	411	515	2	0.4
213310030180	18	450	457.2	461	565	2	0.4
213310030200	20	500	508.0	512	620	2	0.5
213310030240	24	600	609.6	614	725	2	0.8
213310030280	28	700	711.2	716	840	2	0.8
213310030320	32	800	812.8	818	950	2	0.8
213310030360	36	900	914.4	920	1050	2	1
213310030400	40	1000	1016.0	1022	1160	2	1

CHARACTERISTICS

Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C